

16D33-R

Item Description

Female Plug, Contact & Insulator, Cam-Type, Detachable, Double Set Screw Termination, 1/0 - 4/0 AWG, 400 Amp Max, 16 Series Taper Nose, Type 3R "While-in-Use" - RED



Technical Information

Electrical Specifications

Max. Amperage: 400 Amp

Max. Voltage: 600 Volt

Material Specifications

Sleeve Material: Santroprene TPV

Contact Material: Brass

Strain Relief: Copper Wire

Mechanical Specifications

Gender: Female

Connection Type: Double Set Screw

Cable Range: 1/0-4/0 AWG

Product Features

Color: Red

Contact Cat. No.: 16D33-C

Insulator Cat. No.: 16SDF-14R

Standards and Certifications

UL Listed: File E13399


CSA Certified: File 152105

NEMA Rating: Type 3R

Color:  Red

UPC Code: 07847702285

Country of Origin: Please Contact Customer Service

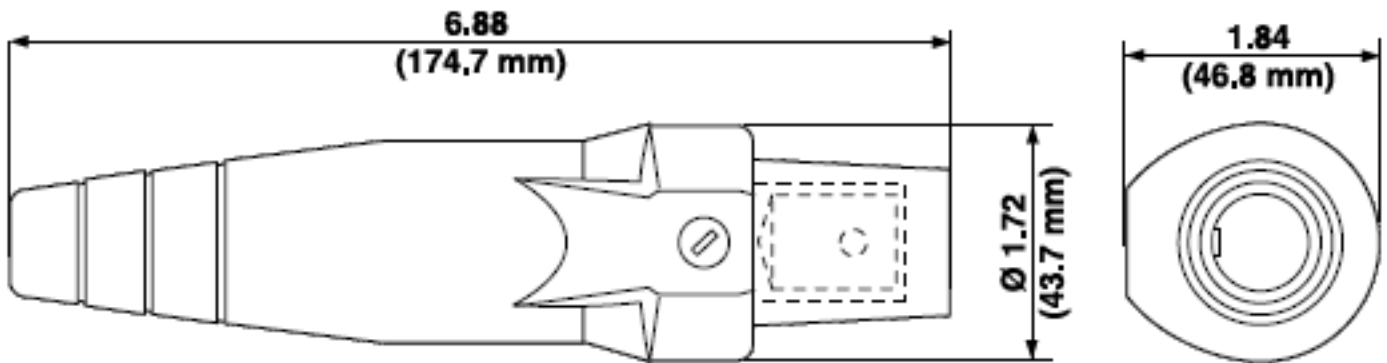

Female Detachable Plug – Double Set Screw

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 ·

FAX: 1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2012-2015 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

