

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- UL Standard
- 1. Rated voltage/current : 600V / 15A
- 2. Withstanding voltage : AC2200V/Min.
- 3. Torque value : M3 , 4.43lb.in
- 4. Wire range : 24~12AWG




IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	8.0kV
Rate Voltage(V)	800V
Rate Current(A)	16A

- 2. Torque value : M3 , 0.5N·m
- 3. Wire range : 0.2~4mm<sup>2</sup>


NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 6:20mm, Poles : N=01P
- 3. Stripping length : 8~9mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

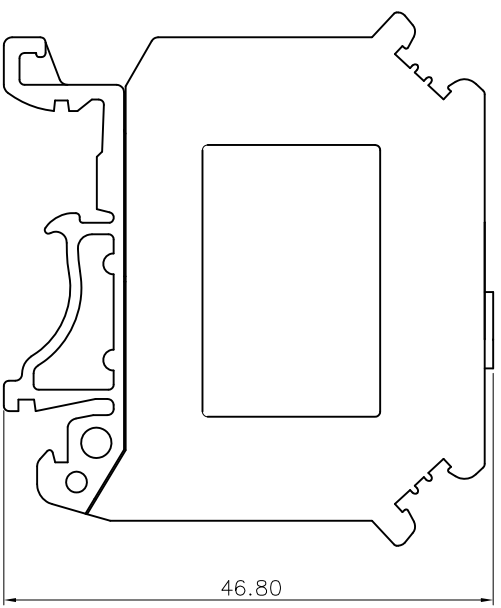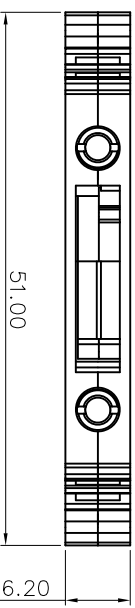

Pitch range in mm	Nominal dimension range		Over	Over	Over	Over
	mm	In mm				
Over	6	10	30	60	100	150
TO	10	24	30	60	100	150
6	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
			±1.00	±1.00	±1.30	±2*

6. RoHS Compliance

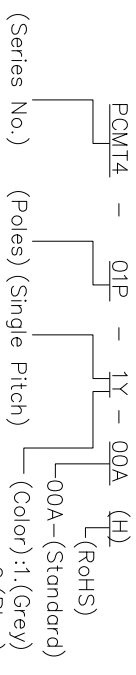

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	<b>DEGSON</b> NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1