

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 10A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M3 , 4.43lb.in
- 4.Wire range : 24~14AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	6.0kV
Rate Voltage(V)	500V
Rate Current(A)	16A






- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.2~2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.20mm, Poles : N=01P
- 3.Stripping length : 8~9mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm		D
	Over	Under	
6 TO 10	6.0	5.8	0.1/10
10 TO 24	10.0	9.8	0.1/10
30 TO 60	30.0	29.8	0.1/10
60 TO 100	60.0	59.8	0.1/10
100 TO 150	100.0	99.8	0.1/10
±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30	±2'	±2'	±2'

6.RoHS Compliance

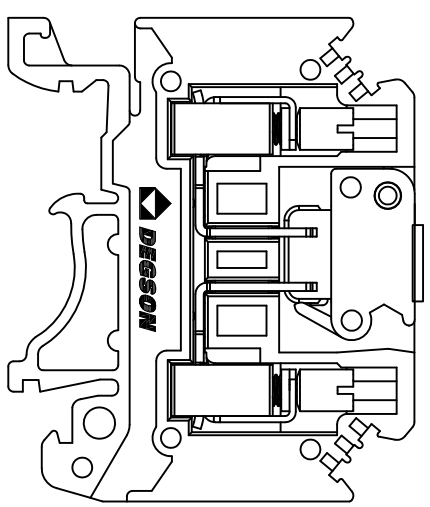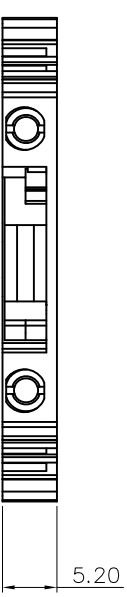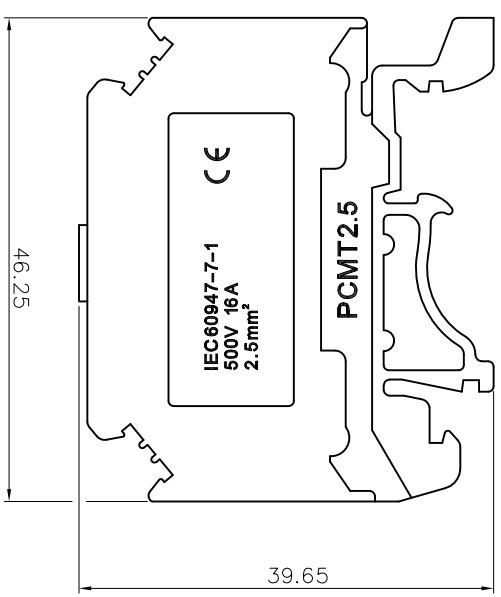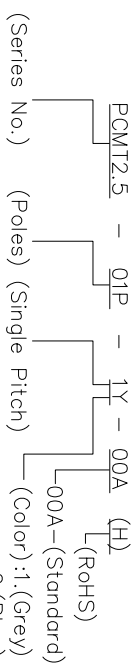

DETACHED LISTS

PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:	/	TITLE:	CUSTOMER DRAWING	
CHKD:	/	DRAWING NO.:	/	SHEET
DRFT:	/	DO NOT SCALE DRAWING	SCALE	1:1
THIRD ANGLE PROJECTION				