


Material: Nylon 66, UL 94V-2 (94V-0 available)

Color: Natural, Black, Red, Green, Blue, Yellow, Purple, Gray available upon request

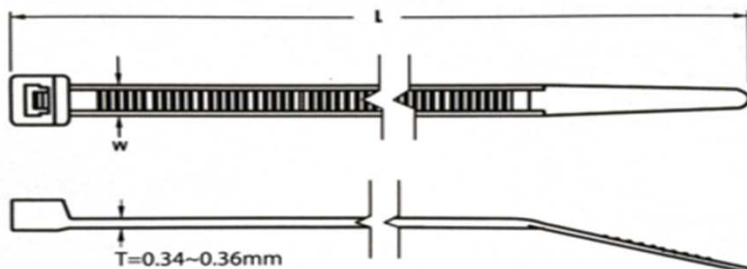

ITEM NO.	L		W		Max. Bundle Dia.		Min. Tensile Strength	
	mm	inch	mm	inch	mm	inch	lbs	kgs
KC-080W	80	3.125	2.5	0.098	15	0.59	18	8
KC-090W	90	3.75	2.5	0.098	21	0.83	18	8
KC-100W	100	4	2.5	0.098	22	0.87	18	8
KC-120W	120	4.75	2.5	0.098	28	1.1	18	8
KC-140W	142	5.5	2.5	0.098	35	1.38	18	8
KC-165W	165	6.5	2.5	0.098	43	1.69	18	8
KC-200W	203	8	2.5	0.098	53	2.09	18	8
KC-140SW	142	5.5	3.6	0.142	33	1.3	40	18
KC-150SW	150	6	3.6	0.142	35	1.38	40	18
KC-180SW	180	7	3.6	0.142	44	1.73	40	18
KC-200ASW	203	8	3.6	0.142	52	2.05	40	18
KC-250SW	250	10	3.6	0.142	65	2.56	40	18
KC-292SW	300	11.5	3.6	0.142	76	2.99	40	18
KC-368SW	368	14.5	3.6	0.142	102	4.02	40	18
KC-120MW	120	4.75	4.6	0.181	24	0.94	50	22
KC-160MW	160	6.25	4.6	0.181	38	1.5	50	22
KC-190MW	190	7.5	4.6	0.181	46	1.81	50	22
KC-200MW	203	8	4.6	0.181	50	1.97	50	22
KC-250MW	250	10	4.6	0.181	65	2.56	50	22
KC-280MW	280	11	4.6	0.181	75	2.95	50	22
KC-300MW	300	11.5	4.6	0.181	80	3.15	50	22
KC-368MW	368	14.5	4.6	0.181	102	4.02	50	22
KC-385MW	385	15.187	4.6	0.181	105	4.13	50	22
KC-432MW	432	17	4.6	0.181	120	4.72	50	22
KC-530MW	530	20.75	4.6	0.181	150	5.91	50	22
KC-150LW	150	6	7.6	0.299	33	1.3	120	55
KC-200LW	203	8	7.6	0.299	50	1.97	120	55
KC-250LW	250	10	7.6	0.299	63	2.48	120	55
KC-280LW	280	11	7.6	0.299	74	2.91	120	55
KC-300LW	300	11.875	7.6	0.299	80	3.15	120	55
KC-340LW	340	13.5	7.6	0.299	92	3.62	120	55
KC-380LW	370	14.5	7.6	0.299	102	4.05	120	55
KC-450LW	450	17.75	7.6	0.299	128	5.05	120	55
KC-500LW	500	19.6875	7.6	0.299	143	5.63	120	55
KC-550LW	550	21.687	7.6	0.299	160	6.3	120	55
KC-750LW	750	29.5	7.6	0.299	223	8.78	120	55
KC-430LLW	430	17	9	0.354	116	4.57	175	80
KC-450LLW	450	17.75	9	0.354	124	4.88	175	80
KC-550LLW	550	21.6875	9	0.354	155	6.1	175	80
KC-610LLW	610	24	9	0.354	175	6.89	175	80
KC-710LLW	710	28	9	0.354	207	8.15	175	80
KC-780LLW	776	30.5	9	0.354	228	8.98	175	80
KC-810LLW	812	32	9	0.354	239	9.41	175	80
KC-920LLW	920	36.25	9	0.354	263	10.35	175	80
KC-1020LLW	1020	40.125	9	0.354	306	12.05	175	80
KC-1220LW	1220	48	9	0.354	367	14.45	175	80
KC-480XLW	480	18.875	12.6	0.5	120	4.72	250	114
KC-580XLW	580	22.75	12.6	0.5	152	5.98	250	114
KC-1030XLW	1030	40.5	12.6	0.5	295	11.61	250	114