














JCUK Terminal Blocks

1. General

JCUK series is applicable to circuit as wire connection with rated voltage not more than 690 V (660V) and rated cross-sectional area of 150mm².
Standard: GB/T 14048.7 IEC 60947-7-1.



2. Overall and mounting dimensions

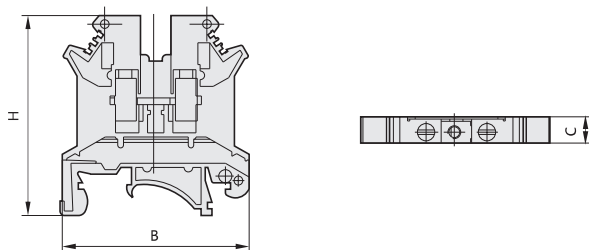

NO.	Product type	Boundary dimension(mm)			Type of mounting rail	Remark
		B	C	H		
1	JCUK-2.5N	43	6.2	41	TH35/G32	
2	JCUK-3N	43	5.2	46	TH35/G32	
3	JCUK-5N	43	6.3	46	TH35/G32	
4	JCUK-6N	43	8.2	46.5	TH35/G32	
5	JCUK-10N	43	10.2	46.5	TH35/G32	
6	JCUK-16N	43.5	12.2	51.5	TH35/G32	
7	JCUK-35N	51	15.5	61.5	TH35/G32	
8	JCUK-50H	76.5	20.5	76.5	TH35/G32	
9	JCUK-95H	89	25.5	90.5	TH35/G32	
10	JCUK-150H	106	31.3	112.5	TH35/G32	
11	JCUK/S	73	8.3	51	TH35/G32	
12	JCUK/K5	57	8.7	61.5	TH35/G32	
13	JCUK/DK4	64	6.2	46.5	TH35/G32	
14	JCUK-5JD	43	6.5	45.5	TH35/G32	
15	JCUK-10JD	43	10.5	45.5	TH35/G32	
16	JCUK-16JD	43	12.4	52.5	TH35/G32	
17	JCUK-35JD	51	15.4	61.5	TH35/G32	
18	JCUK-5RD	73	8.5	57	TH35/G32	Size of fuse link 5X25, rated current 6.3A
19	JCUK-10RD	63	12.5	56.5	TH35/G32	Size of fuse link 5X20, rated current 10A
20	E/UK(fastener)				TH35/G32	
21	JCUK-BJ(marked number)	1~10				
22	D/UK4/10(3N-16N baffle plate, JUCK-2.5N baffle plate)					

3. Ordering information

3.1 When ordering, you shall indicate product type, wiring area or current, category, and quantity;

3.2 Conventional terminal block consists of 10 pieces to a line.

3.3 Other special requirements shall be indicated.

3.4 Ordering example: JCUK-2.5N/10 5 pieces

Mean: Product number: JCUK, wiring area: 2.5mm², category: general type and total quantity: 5