

Lubricants

Application:

- STL thread lubricant is used between any screw thread and its tapped opening, on any rotating shaft – threaded or plain, and to inhibit corrosion on any metal-to-metal joint of apparatus and control enclosures.
- HTL high temperature lubricant is used on lighting fixture threaded joints and on threaded joints of the enclosures of any heat-producing apparatus or control.

Features:


STL thread lubricant is lithium based, anti-galling and:

- is especially effective between parts made of dissimilar metals
- is effective and stable from -20°F to +300°F
- maintains grounding continuity; should not be used on exposed current-carrying parts
- has excellent adhesion qualities

A liberal application on threaded joints maintains raintightness and inhibits corrosion.

HTL is a high temperature, anti-seize, conductive thread lubricant:

- effective and stable from -70°F to +1800°F
- prevents seizure, galling, rust, galvanic action
- maintains grounding continuity; should not be used on exposed current-carrying parts
- effective between parts made of dissimilar metals

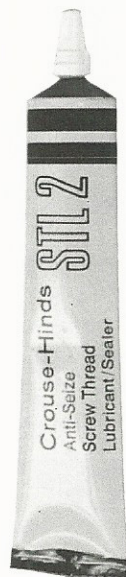

STL Thread Lubricant

**Net
Wt.**
1 3/4 oz. (tube)
8 oz. (can)



Cat. #
STL2
STL8



HTL High Temperature Thread Lubricant

**Net
Wt.**
4 oz. (tube)

Cat. #
HTL4

MSDS Sheets are available at www.crouse-hinds.com