
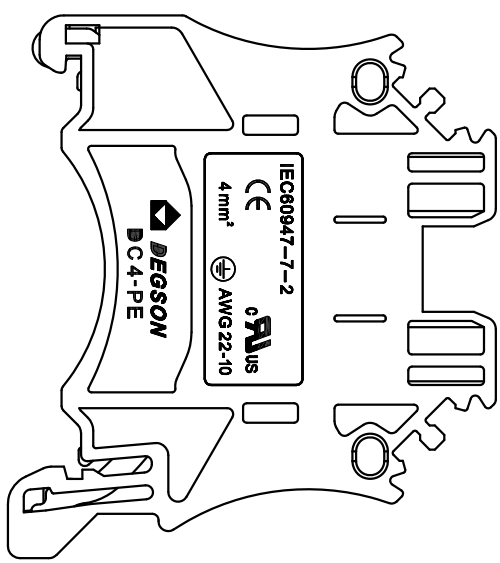

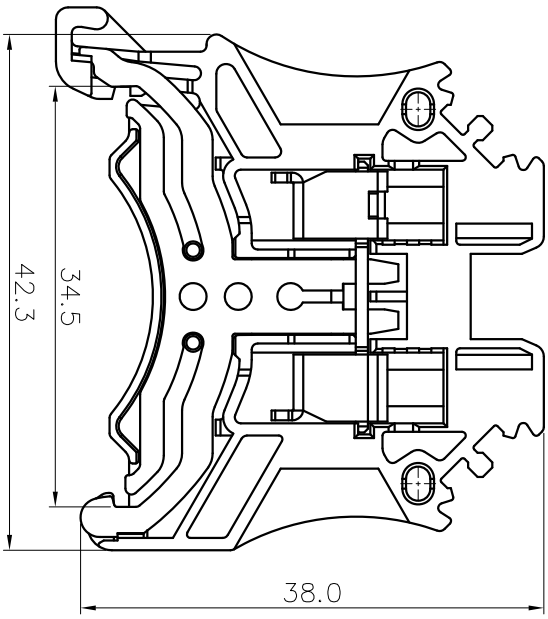


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



NOTE1:

- UL Standard
- 1. Torque value : M3 , 4.43Lb.in
- 2. Wire range : 22~10AWG

IEC Standard

- 1. Torque value : M3 , 0.5N·m
- 2. Wire range : 0.5~4mm²

NOTE2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 6.1mm, Poles : N=01P
- 3. Stripping length : 8~9mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch	Range	In	Nominal	Dimension	Range	mm	In	mm	In
Over	6	10	TO	30	60	100	150	0.1	1/10
TO	10	24	TO	60	100	150	150	∠	∠
6	10	24	30	60	100	150	150	±2°	±2°

6. RoHS Compliance

DC4-PE - 01P - 1C - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)
 C.(Yellow and green)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SCALE	1:1

A 8 7 6 5 4 3 2 1