


Wall mounted socket - Part no. 6580


- screw terminals
- SoftCONTACT
- switched
- mechanical DUO-interlock
- highly heat resistant contact carrier
- receptacles can be padlocked

Protection type	IP 44
Ampere	63 A
Poles	4p
Voltage	600-690
Hertz	50-60Hz
Earth position	5h
Contact	standard
Connection technology	Screw terminals

Std. Pack. 3 Qty.

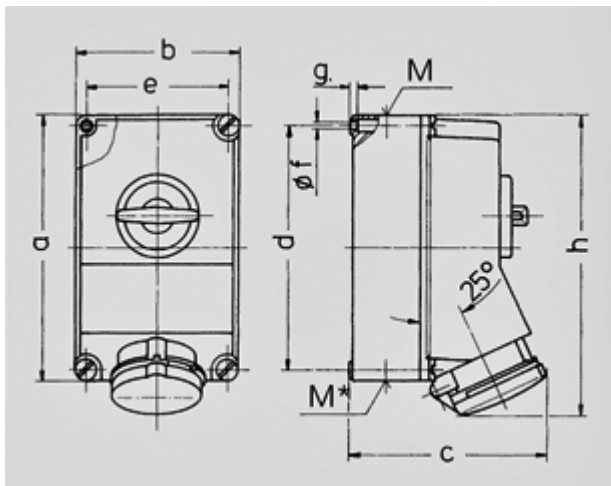

Drawing	Amp.	63		
		Poles		
1 MB 234		3	4	5
Dim. in mm	a	264	264	264
	b	163	163	163
	c	192	192	192
	d	240	240	240
	e	140	140	140
	f	8,1	8,1	8,1
	g	8	8	8
	h	300	300	300
	M	40	40	40
	M*	2x40	2x40	2x40
Max. cable diam. (mm)		27	27	27
Terminal for cond. cross section (mm ²) min.-max.		6	6	6
		-25	-25	-25