


TERMINALES DE COBRE ESTAÑADO - CAÑÓN CORTO

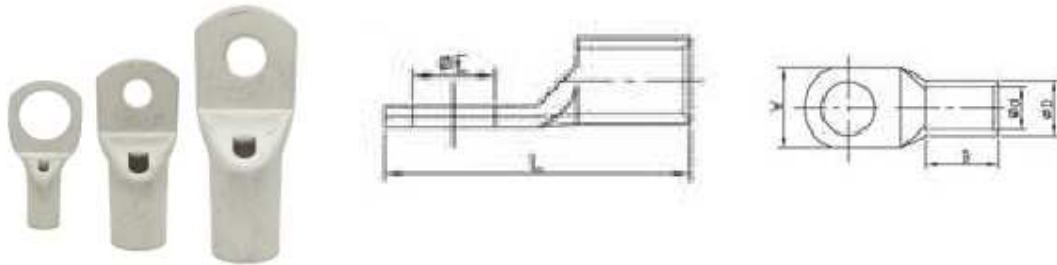

Ítem	Agujero		Tamaño del terminal				Tamaño de cable		
	ΦE	Pulg.	ΦD	W	B	L	Φd	AWG	mm ²
B-T2.5-5	5.3	3/16"	4.0	8.7	7.0	19.0	2.7	14	2,5
B-T2.5-6	6.4	1/4"	4.0	10.3	7.0	21.0	2.7	14	2,5
B-T4-5	5.3	3/16"	4.5	8.7	9.5	21.5	3.1	12	4
B-T4-6	6.4	1/4"	4.5	10.3	9.5	23.5	3.1	12	4
B-T6-5	5.3	3/16"	5.2	10.3	10.0	26.0	3.8	10	6
B-T6-6	6.4	1/4"	5.2	10.3	10.0	26.0	3.8	10	6
B-T6-8	8.3	5/16	5.2	13.9	10.0	29.0	3.8	10	6
B-T10-5	5.3	3/16"	6.5	11.9	11.5	27.5	4.7	8	10
B-T10-6	6.4	1/4"	6.5	11.9	11.5	27.5	4.7	8	10
B-T10-8	8.3	5/16	6.5	13.5	11.5	30.5	4.7	8	10
B-T10-10	10.5	3/8	6.5	15.0	11.5	30.5	4.7	8	10
B-T16-6	6.4	1/4"	7.4	12.0	12.0	27.5	5.6	6	16
B-T16-8	8.3	5/16	7.4	13.5	12.0	31.0	5.6	6	16
B-T16-10	10.5	3/8	7.4	16.0	12.0	32.0	5.6	6	16
B-T16-12	13.2	1/2"	7.4	17.0	12.0	37.5	5.6	6	16
B-T25-6	6.4	1/4"	9.1	14.0	13.5	34.0	7.1	4	25
B-T25-8	8.3	5/16	9.1	14.0	13.5	34.0	7.1	4	25
B-T25-10	10.5	3/8	9.1	16.0	13.5	37.0	7.1	4	25
B-T25-12	13.2	1/2"	9.1	18.0	13.5	40.0	7.1	4	25
B-T35-6	6.4	1/4"	10.5	16.0	16.0	39.0	8.2	2	35
B-T35-8	8.3	5/16	10.5	16.0	16.0	39.0	8.2	2	35
B-T35-10	10.5	3/8	10.5	16.0	16.0	43.0	8.2	2	35
B-T35-12	13.2	1/2"	10.5	18.0	16.0	43.0	8.2	2	35