

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- UL Standard
- 1. Rated voltage/current : 600V / 125A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Torque value : M6 , 31Lb.in
- 4. Wire range : 6~1/0AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	1000V
Rate current(A)	150A


- 2. Torque value : M6 , 3.5N·m
- 3. Wire range : 16~50mm²

NOTES2:





- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 20.0mm, Poles : N=01P
- 3. Stripping length : 24~25mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	In mm		Nominal Dimension Range		Tolerance		
	Over	Under	Over	Under			
6	TO	10	30	60	100	150	0.1/10
	TO	10	10	10	100	150	
10	TO	24	30	60	100	150	∠
	TO	10	30	60	100	150	

6. RoHS Compliance

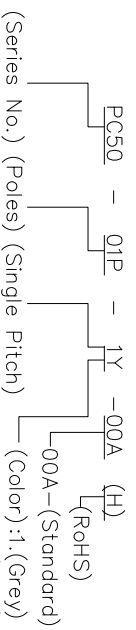

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

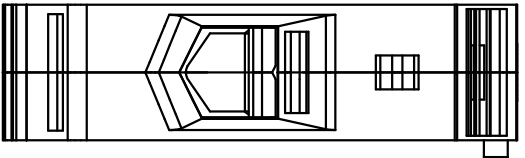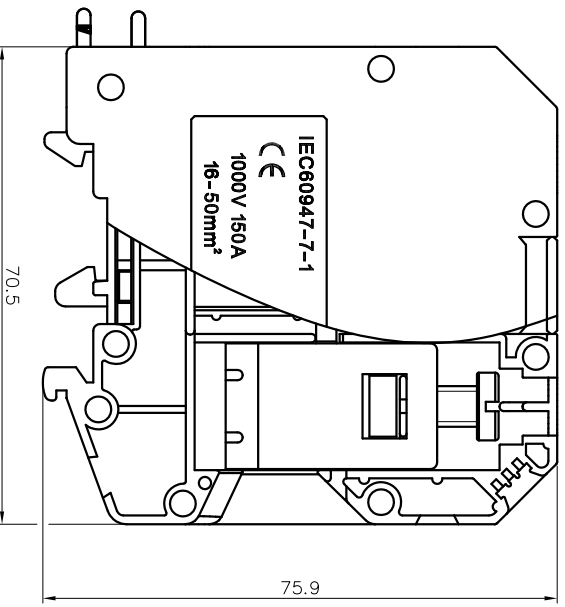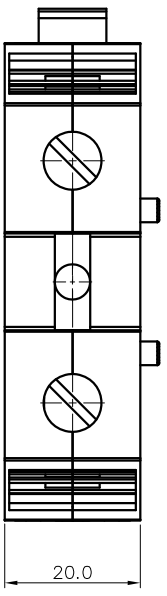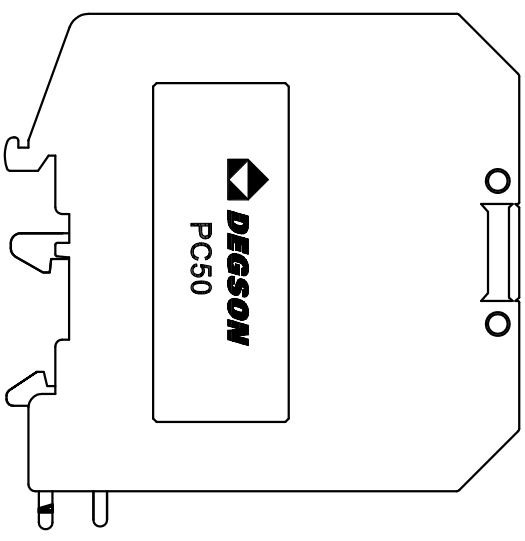

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD.:	/	TITLE:	CUSTOMER DRAWING
CHKD.:	/	DRAWING NO.:	/
DRFT.:	/	DO NOT SCALE DRAWING	SCALE
THIRD ANGLE PROJECTION		SCALE	1:1

A B C D E F G H

A B C D E F G H

8 7 6 5 4 3 2 1