


LV429387

shunt trip voltage release MX - 208..277V
60Hz, 220..240V 50/60Hz

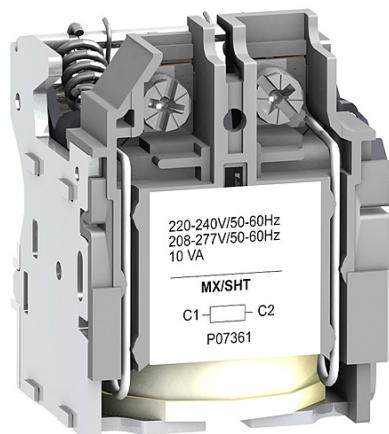

Main

Range of product	NSX100...250 NSX400...630
Device short name	MX
Voltage release type	Shunt trip release

Complementary

Control signal type	Impulse Maintained
Impulse duration	≥ 20 ms
Control circuit voltage	208...277 V AC 60 Hz 220...240 V AC 50/60 Hz
Threshold tripping voltage	0.7...1.1 x U_n opening
Supply inrush power	30 W
Mounting mode	Fixed
Response time	50 ms
Auxiliary connection terminal	Screw terminal ≤ 1.5 mm ²

Environment

RoHS EUR conformity date	0819
RoHS EUR status	Compliant

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.